



Swedish Certification Body for IT Security

Certification Report - HP NAMS

Issue: 1.0, 2019-Dec-18

Table of Contents

1	Executive Summary	3
2	Identification	5
3	Security Policy	7
3.1	Auditing	7
3.2	Cryptography	7
3.3	Identification and Authentication	7
3.4	Data Protection and Access Control	8
3.5	Protection of the TSF	8
3.6	TOE Access Protection	8
3.7	Trusted Channel Communication and Certificate Management	9
3.8	Security Management	9
4	Assumptions and Clarification of Scope	10
4.1	Assumptions	10
4.2	Clarification of Scope	10
5	Architectural Information	12
6	Documentation	13
7	IT Product Testing	14
7.1	Developer Testing	14
7.2	Evaluator Testing	14
7.3	Penetration Testing	14
8	Evaluated Configuration	15
9	Results of the Evaluation	16
10	Evaluator Comments and Recommendations	18
11	Glossary	19
12	Bibliography	21
Appendix A	Scheme Versions	23

1 Executive Summary

The Target of Evaluation, TOE, is the FutureSmart 4.6.3 firmware for the network single-function (SFP) printer model series:

HP PageWide Enterprise Color 556,
HP PageWide Managed Color E55650,
HP LaserJet Enterprise M607 / M608 / M609,
HP LaserJet Managed E60055 / E60065 / E60075,
HP PageWide Enterprise Color 765,
HP PageWide Managed Color E75160,
HP LaserJet Enterprise Color M652 / M653,
HP LaserJet Managed Color E65050 / E65060.

These SFPs provide functions for network printing, storing, and retrieving of documents. The evaluated security features include self-testing, administrator and user identification, authentication, encrypted network communication (IPSec), encrypted storage of files, access control, audit etc.

The ST claims demonstrable conformance to the IEEE Std 2600.1-2009 Protection Profile for Hardcopy Devices, Operational Environment A, v1.0 [PP2600A], including the DSR, PRT, and SMI packages.

The evaluation has been performed by atsec information security AB in their premises in Danderyd, Sweden, to some extent in the approved foreign location in Austin, Texas, USA, and the developer's premises in Boise, Idaho, USA, and was completed on the 3rd of December 2019.

The evaluation was conducted in accordance with the requirements of Common Criteria, version 3.1, release 5, and the Common Methodology for IT Security Evaluation, version 3.1, release 5. The evaluation conforms to evaluation assurance level EAL 3, augmented by ALC_FLR.2.

atsec information security AB is a licensed evaluation facility for Common Criteria under the Swedish Common Criteria Evaluation and Certification Scheme. atsec information security AB is also accredited by the Swedish accreditation body SWEDAC according to ISO/IEC 17025 for Common Criteria evaluation.

The certifier monitored the activities of the evaluator by reviewing all successive versions of the evaluation reports. The certifier determined that the evaluation results confirm the security claims in the Security Target [ST], and have been reached in agreement with the requirements of the Common Criteria and the Common Methodology for the evaluation assurance level EAL 3 + ALC_FLR.2.

Swedish Certification Body for IT Security

Certification Report HP NAMS

The certification results only apply to the version of the product indicated in the certificate, and on the condition that all the stipulations in the Security Target are met.

This certificate is not an endorsement of the IT product by CSEC or any other organisation that recognises or gives effect to this certificate, and no warranty of the IT product by CSEC or any other organisation that recognises or gives effect to this certificate is either expressed or implied.

2 Identification

Certification Identification	
Certification ID	CSEC2017008
Name and version of the certified IT product	FutureSmart 4.6.3 firmware for the MFP model series listed below
Security Target	HP PageWide Enterprise Color 556, HP PageWide Managed Color E55650, HP LaserJet Enterprise M607 / M608 / M609, HP LaserJet Managed E60055 / E60065 / E60075, HP PageWide Enterprise Color 765, HP PageWide Managed Color E75160, HP LaserJet Enterprise Color M652 / M653, HP LaserJet Managed Color E65050 / E65060 Security Target
Assurance packages	EAL 3 + ALC_FLR.2
Sponsor	HP Inc.
Developer	HP Inc.
ITSEF	atsec information security AB
Common Criteria version	3.1 release 5
CEM version	3.1 release 5
QMS version	1.23
Scheme Notes Release	14.0
Recognition Scope	CCRA, SOGIS, and EA/MLA
Certification date	2019-12-18

Certified product versions (system firmware, JetDirect firmware, model series):

2405268_022711 JSI24050246 HP PageWide Enterprise Color 556
 2405268_022711 JSI24050246 HP PageWide Managed Color E55650
 2405268_022708 JSI24050246 HP LaserJet Enterprise M607
 2405268_022708 JSI24050246 HP LaserJet Enterprise M608
 2405268_022708 JSI24050246 HP LaserJet Enterprise M609
 2405268_022708 JSI24050246 HP LaserJet Managed E60055
 2405268_022708 JSI24050246 HP LaserJet Managed E60065
 2405268_022708 JSI24050246 HP LaserJet Managed E60075

Swedish Certification Body for IT Security

Certification Report HP NAMS

2405268_022745 JSI24050246 HP PageWide Enterprise Color 765
2405268_022745 JSI24050246 HP PageWide Managed Color E75160
2405268_022697 JSI24050246 HP LaserJet Enterprise Color M652
2405268_022697 JSI24050246 HP LaserJet Enterprise Color M653
2405268_022697 JSI24050246 HP LaserJet Managed Color E65050
2405268_022697 JSI24050246 HP LaserJet Managed Color E65060

3 Security Policy

The TOE provides the following security services:

- Auditing
- Cryptography
- Identification and authentication
- Protection of the TSF
- TOE access protection
- Trusted channel communication and certificate management
- User and access management

A brief description of each security policy is given below. A more detailed description is given in the ST.

3.1 Auditing

The TOE performs auditing of security relevant functions. Both the Jetdirect Inside Firmware and System Firmware generate audit records. The TOE connects and sends audit records to an external syslog server for long-term storage and audit review.

3.2 Cryptography

The TOE uses IPsec to protect its communications channels. The QuickSec cryptographic library, which is part of the Operational Environment, implements the cryptographic algorithms for IPsec. Please note that the TOE's usage of IPsec is tested during the evaluation.

The TOE supports key derivation and decryption for printing encrypted stored print jobs. Both the key derivation function and decryption algorithm used by the TOE for this are included in the TOE.

3.3 Identification and Authentication

The TOE supports multiple Control Panel sign in methods, both local and remote methods:

- Local sign in method:
 - Local Device Sign In (Local Administrator account only)
- Remote sign in methods:
 - LDAP Sign In
 - Windows Sign In (via Kerberos)

The Control Panel allows both non-administrative users (U.NORMAL) and administrative users (U.ADMINISTRATOR) to sign in.

The TOE also uses IPsec to identify and mutually authenticate the following user types:

- Administrative Computer (U.ADMINISTRATOR)
- Network Client Computer (U.NORMAL)

3.4 Data Protection and Access Control

The TOE controls user access to functions available at the Control Panel using permissions. Each Control Panel application and protected feature has an associated permission. A permission is configured to either grant or deny access. Permissions are defined in Permission Sets (a.k.a. User Roles) which are assigned to users. To execute a Control Panel application or protected feature, the applicable permission must be configured to grant access in the Permission Set applied to a user.

Users control access to print (non-encrypted) jobs that they place in Job Storage by assigning Job PINs to these jobs.

The TOE also can store and decrypt encrypted stored print jobs received from a client computer that has the HP Universal Printer Driver installed. A stored print job is first encrypted by the client computer and protected with a user-specified Job Encryption Password. The job is sent encrypted to the TOE and stored encrypted by the TOE.

To print or delete an encrypted stored print job at the Control Panel, a non-administrative user must provide the correct Job Encryption Password for the encrypted stored print job. An administrative user can delete an encrypted stored print job at the Control Panel without providing a Job Encryption Password but must provide the correct Job Encryption Password to print the job.

3.5 Protection of the TSF

The TOE allows an administrator to restrict forwarding of data to an external interface.

The TOE contains a suite of self tests to test specific security functionality of the TOE. It contains data integrity checks for testing specific TSF Data of the TOE and for testing the stored TOE executables.

The TOE contains a system clock that is used to generate reliable timestamps. In the evaluated configuration, TOE can optionally be configured to synchronize its system clock with a Network Time Protocol (NTP) server.

3.6 TOE Access Protection

The TOE supports an inactivity timeout for Control Panel sessions. If a logged in user is inactive for longer than the specified period, the user is automatically logged off of the TOE.

3.7 Trusted Channel Communication and Certificate Management

The TOE uses IPsec as means to provide trusted channel communications. IPsec uses X.509v3 certificates, the Internet Security Association and Key Management Protocol (ISAKMP), IKEv1, IKEv2 and Encapsulating Security Payload (ESP) to protect communications.

The IPsec and IKE cryptographic algorithms are all supplied by the QuickSec cryptographic library. The QuickSec cryptographic library is part of the Operational Environment, but the TOE controls the usage of these algorithms.

In addition, the TOE provides certificate management functions used to manage (add, replace, delete) X.509v3 certificates.

3.8 Security Management

Only administrators have the authority to manage the security functionality of the TOE. They can manage the Administrator Access Code, IPsec certificates, IPsec/Firewall address templates, service templates and rules, sign-in policy, and the system clock.

Normal users can only manage user data that they have access to on the TOE.

4 Assumptions and Clarification of Scope

4.1 Assumptions

The Security Target [ST] makes eight assumptions on the usage and the operational environment of the TOE.

A.ACCESS.MANAGED

The TOE is located in a restricted or monitored environment that provides protection from unmanaged access to the physical components and data interfaces of the TOE.

A.ADMIN.PC.SECURE

The administrative computer is in a physically secured and managed environment and only the authorized administrator has access to it.

A.USER.PC.POLICY

User computers are configured and used in conformance with the organization's security policies.

A.USER.TRAINING

TOE Users are aware of the security policies and procedures of their organization, and are trained and competent to follow those policies and procedures.

A.ADMIN.TRAINING

Administrators are aware of the security policies and procedures of their organization, are trained and competent to follow the manufacturer's guidance and documentation, and correctly configure and operate the TOE in accordance with those policies and procedures.

A.ADMIN.TRUST

Administrators do not use their privileged access rights for malicious purposes.

A.EMAILS.PROTECTED

For emails received by the SMTP gateway from the TOE, the transmission of emails between the SMTP gateway and the email's destination is protected.

A.SERVICES.RELIABLE

When the TOE uses any of the network services DNS, Kerberos, LDAP, NTP, SMTP, syslog, and/or WINS, these services provide reliable information and responses to the TOE.

4.2 Clarification of Scope

The Security Target contains six threats, which have been considered during the evaluation.

T.DOC.DIS

User Document Data may be disclosed to unauthorized persons.

T.DOC.ALT

User Document Data may be altered by unauthorized persons.

Swedish Certification Body for IT Security

Certification Report HP NAMS

T.FUNC.ALT

User Function Data may be altered by unauthorized persons.

T.PROT.ALT

TSF Protected Data may be altered by unauthorized persons.

T.CONF.DIS

TSF Confidential Data may be disclosed to unauthorized persons.

T.CONF.ALT

TSF Confidential Data may be altered by unauthorized persons.

The Security Target contains seven Organisational Security Policies (OSPs), which have been considered during the evaluation.

P.USER.AUTHORIZATION

To preserve operational accountability and security, users will be authorized to use the TOE only as permitted by the TOE owner.

P.SOFTWARE.VERIFICATION

To detect corruption of the executable code in the TSF, procedures will exist to self-verify executable code in the TSF.

P.ADMIN.PASSWORD

To restrict access to administrative tasks, the Device Administrator Password will be set in the evaluated configuration so that it is required to perform security-relevant actions through the EWS and at the Control Panel.

P.AUDIT.LOGGING

To preserve operational accountability and security, records that provide an audit trail of TOE use and security-relevant events will be created, maintained, and protected from unauthorized disclosure or alteration, and will be reviewed by authorized personnel.

P.INTERFACE.MANAGEMENT

To prevent unauthorized use of the external interfaces of the TOE, operation of those interfaces will be controlled by the TOE and its IT environment.

P.REMOTE_PANEL.DISALLOWED

To preserve operational accountability and security, administrators must not use the Remote Control-Panel feature.


P.USERNAME.CHARACTER_SET

To prevent ambiguous user names in the TOE's audit trail, the user names of the LDAP and Windows Sign In users must only contain ASCII printable characters except for the double quote (22 hex) and single quote (27 hex) characters (i.e., allowed ASCII characters in hexadecimal: 20, 21, 23 - 26, 28 - 7E).

5 Architectural Information

TOE is the firmware of an SFP designed to be shared by many client computers and human users. It performs the functions of printing, storing, and retrieving documents. It can be connected to a wired local network through the embedded Jetdirect Inside's built-in Ethernet, or to a USB device using its USB port (but the use of which must be disabled in the evaluated configuration).

In the diagram below, the unshaded parts show the Firmware parts that constitute the TOE.

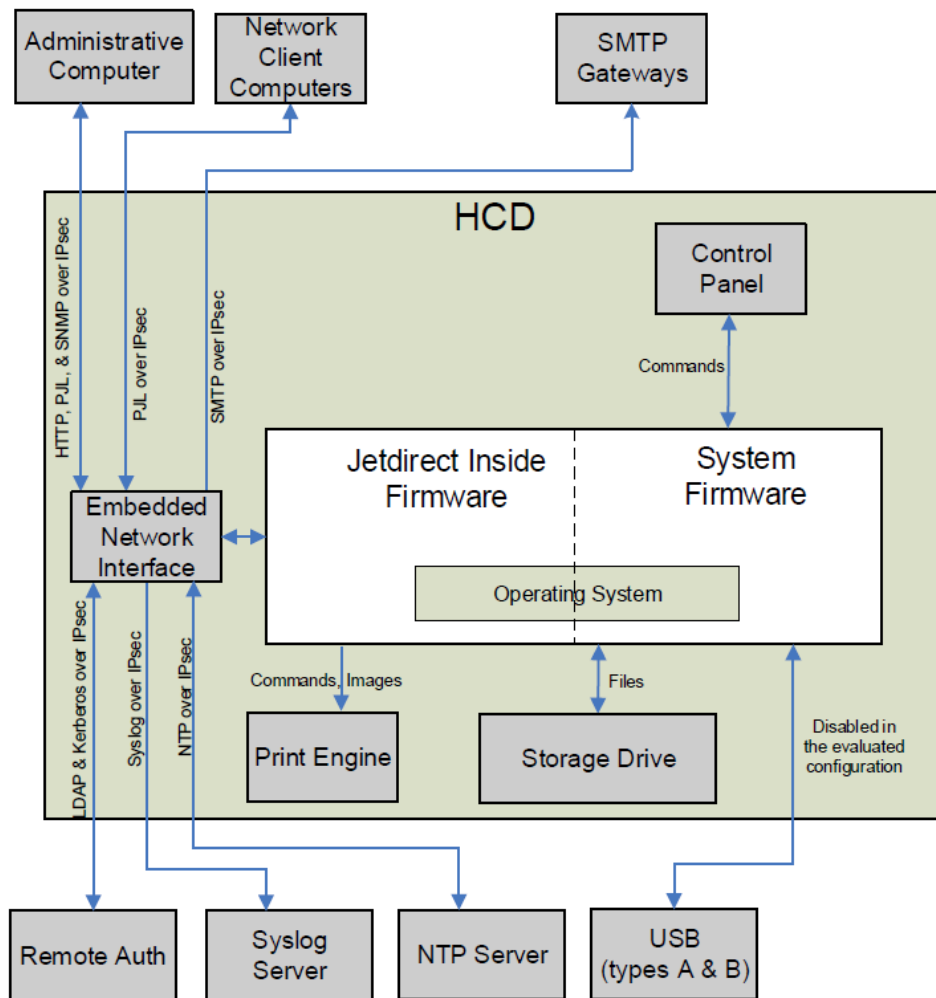

The Security Target [ST] contains further descriptions of the product components and the TOE.

6 Documentation

For proper configuration of the TOE into the evaluated configuration, the following guidance documents are available:

CCECG	Common Criteria Evaluated Configuration Guide for HP Single-Function Printers HP LaserJet Enterprise M607/M608/M609, HP LaserJet Managed E60055/E60065/E60075, HP Color LaserJet Enterprise M652/M653, HP Color LaserJet Managed E65060/E65060, HP PageWide Enterprise Color 556, HP PageWide Enterprise Color 765, HP PageWide Managed Color E55650, HP PageWide Managed Color E75160
556UG	HP PageWide Enterprise Color 556 User Guide
556IG	HP PageWide Enterprise Color 556 Installation Guide
M607/8/9UG	HP LaserJet Enterprise M607, M608, M609 User guide
M607/8/9IG	HP LaserJet Enterprise M607, M608, M609 Installation Guide
765UG	HP PageWide Enterprise Color 765, HP PageWide Color 755 User Guide
765IG	HP PageWide Enterprise Color 765 series HP PageWide Color 755 series Installation Guide
E75160UG	HP PageWide Managed Color E75160, P75250 User guide
E75160IG	HP PageWide Managed Color E75160 Series HP PageWide Managed Color P75250 Series Installation Guide
M652/3UG	HP Color LaserJet Enterprise M652, M653 User Guide
M652IG	HP Color LaserJet Enterprise M652 Installation Guide
M653IG	HP Color LaserJet Enterprise M653 Installation Guide

7 IT Product Testing

7.1 Developer Testing

The developers tested the TOE on four hardware models, covering all firmwares. All these models were tested both automatically and manually. IPsec was tested on one model. The developer tests cover all TSFI, all SFRs and all subsystems.

All test results were as expected.

The testing was performed in the developers premises in Boise, Idaho, USA.

7.2 Evaluator Testing

The evaluators tested the TOE on four hardware models, covering all firmwares, using the developer's automated testing equipment. Two of these models were also tested manually. IPsec was tested on two models.

The evaluators re-ran a sample of manual developer tests as well as all automated tests, and some customisations of the automated tests.

The evaluators automated testing was performed at the developer site in Boise, Idaho, USA.

All test results were as expected.

7.3 Penetration Testing

The evaluators penetration tested the TOE on four hardware models, covering all firmwares.

The testing was performed in the developers premises in Boise, Idaho, USA.

The evaluators examined all potential interfaces (UDP and TCP ports), for IP v4 and for IP v6. Also, the SNMP port (UDP 161) was tested.

The evaluator determined that only UDP port 500 (ISAKMP) is available outside of IPsec, which is the expected result. No open SNMP ports were discovered.

8 Evaluated Configuration

The following items will need to be adhered to in the evaluated configuration:

- Device Administrator Password must be set as per P.ADMIN.PASSWORD
- Only one Administrative Computer is used to manage the TOE
- Third-party solutions are not installed on the TOE
- All stored jobs must be assigned a Job PIN or job encryption password
- Device USB and Host USB plug and play must be disabled
- Firmware upgrades sent as print jobs through P9100 interface must be disabled
- Jetdirect Inside management via telnet and FTP must be disabled
- Jetdirect XML Services must be disabled
- External file system access through PJI and PS must be disabled
- IPsec authentication using X.509v3 certificates must be enabled (IPsec authentication using Kerberos or Pre-Shared Key is not supported)
- IPsec Authentication Headers (AH) must be disabled
- Device Guest permission set must have zero permissions enabled (this disables the Guest role)
- SNMP support limited to:
 - SNMPv1 read-only
 - SNMPv2c read-only
 - SNMPv3
- The Service PIN, used by a customer support engineer to access functions available to HP support personnel, must be disabled
- Near Field Communication (NFC) must be disabled
- Wireless Direct Print must be disabled
- PJI device access commands must be disabled
- User names for the LDAP and Windows Sign In users must only contain the characters defined in P.USERNAME.CHARACTER_SET • Remote Control-Panel use is disallowed per P.REMOTE_PANEL.DISALLOWED
- Local Device Sign In accounts must not be created (i.e., only the Device Administrator account is allowed as a Local Device Sign In account).
- Access must be blocked to the following Web Services (WS):
 - Open Extensibility Platform device (OXPD) Web Services
 - WS* Web Services
- User Access Codes use is disabled
- An IPv4 address must be statically assigned as per the instructions in TOE's configuration guidance [CCEGC]

9 Results of the Evaluation

The evaluators applied each work unit of the Common Methodology [CEM] within the scope of the evaluation, and concluded that the TOE meets the security objectives stated in the Security Target [ST] for an attack potential of Basic.

The certifier reviewed the work of the evaluator and determined that the evaluation was conducted in accordance with the Common Criteria [CC].

The evaluators overall verdict is PASS.

The verdicts for the assurance classes and components are summarised in the following table:

Assurance Class/Family	Short name	Verdict
Development	ADV	PASS
Security Architecture	ADV_ARC.1	PASS
Functional Specification	ADV_FSP.3	PASS
TOE Design	ADV_TDS.2	PASS
Guidance Documents	AGD	PASS
Operational User Guidance	AGD_OPE.1	PASS
Preparative Procedures	AGD_PRE.1	PASS
Life-cycle Support	ALC	PASS
CM Capabilities	ALC_CMC.3	PASS
CM Scope	ALC_CMS.3	PASS
Delivery	ALC_DEL.1	PASS
Development Security	ALC_DVS.1	PASS
Life-cycle Definition	ALC_LCD.1	PASS
Flaw Remediation	ALC_FLR.2	PASS
Security Target Evaluation	ASE	PASS
ST Introduction	ASE_INT.1	PASS
Conformance Claims	ASE_CCL.1	PASS
Security Problem Definition	ASE_SPD.1	PASS
Security Objectives	ASE_OBJ.2	PASS
Extended Components Definition	ASE_ECD.1	PASS
Security Requirements	ASE_REQ.2	PASS
TOE Summary Specification	ASE_TSS.1	PASS
Tests	ATE	PASS
Coverage	ATE_COV.2	PASS
Depth	ATE_DPT.1	PASS

Swedish Certification Body for IT Security

Certification Report HP NAMS

Functional Tests	ATE_FUN.1	PASS
Independent Testing	ATE_IND.2	PASS
Vulnerability Assessment	AVA	PASS
Vulnerability Analysis	AVA_VAN.2	PASS.

10 Evaluator Comments and Recommendations

None.

11 Glossary

BEV	Border Encryption Value
CC	Common Criteria
CSEC	The Swedish Certification Body for IT Security
DNS	Domain Name System
EAL	Evaluated Assurance Level
ESP	Encapsulating Security Payload (IPsec)
EWS	Embedded Web Server
GUI	Graphical User Interface
HCD	Hardcopy Device
HTTP	Hypertext Transfer Protocol
HTTPS	HTTP Secure
IKE	Internet Key Exchange (IPsec)
IP	Internet Protocol
IPSec	Internet Protocol Security
ISAKMP	Internet Security Association Key Management Protocol (IPsec)
IPv4	Internet Protocol version 4
IPv6	Internet Protocol version 6
LDAP	Lightweight Directory Access Protocol
MFP	Multifunction Printer
NTS	Network Time Service
OS	Operating System
OXF	Open Extensibility Platform
OXPd	OXF device layer
PJL	Printer Job Language
PP	Protection Profile
PSTN	Public Switched Telephone Network
REST	Representational State Transfer (a.k.a. RESTful)
RESTful	See REST
SED	Self-Encrypting Drive
SFP	Single Function
SHA	Secure HashAlgorithm
SNMP	Simple Network Management Protocol
ST	Security Target
TCP	Transmission Control Protocol
TLS	Transport Layer Security

Swedish Certification Body for IT Security

Certification Report HP NAMS

TOE	Target of Evaluation
TSF	TOE Security Functions
TSFI	TSF Interface
UDP	User Datagram Protocol
WS	Web Services

12 Bibliography

- ST HP PageWide Enterprise Color 556,
HP PageWide Managed Color E55650,
HP LaserJet Enterprise M607 / M608 / M609,
HP LaserJet Managed E60055 / E60065 / E60075,
HP PageWide Enterprise Color 765,
HP PageWide Managed Color E75160,
HP LaserJet Enterprise Color M652 / M653,
HP LaserJet Managed Color E65050 / E65060 Security Target,
HP Inc., 2019-08-05, document version 2.05
- CCECG Common Criteria Evaluated Configuration Guide for HP
Single-Function Printers HP LaserJet Enterprise M607/M608/M609,
HP LaserJet Managed E60055/E60065/E60075, HP Color LaserJet
Enterprise M652/M653, HP Color LaserJet Managed E65060/E65060,
HP PageWide Enterprise Color 556, HP PageWide Enterprise Color
765, HP PageWide Managed Color E55650, HP PageWide Managed
Color E75160, HP Inc., 2019-06, edition 1
- PP2600A 2600.1-PP, Protection Profile for Hardcopy Devices, Operational
Environment A, IEEE, June 2009, document version 1.0
- 556UG HP PageWide Enterprise Color 556 User Guide, HP Inc., 2016-05,
edition 1
- 556IG HP PageWide Enterprise Color 556 Installation Guide, HP Inc., 2016
- M607/8/9UG HP LaserJet Enterprise M607, M608, M609 User guide, HP Inc.,
2017-08, edition 2
- M607/8/9IG HP LaserJet Enterprise M607, M608, M609 Installation Guide, HP Inc.,
2017
- 765UG HP PageWide Enterprise Color 765, HP PageWide Color 755
User Guide, HP Inc., 2019-01, edition 4

Swedish Certification Body for IT Security

Certification Report HP NAMS

765IG	HP PageWide Enterprise Color 765 series HP PageWide Color 755 series Installation Guide, HP Inc., 2018
E75160UG	HP PageWide Managed Color E75160, P75250 User guide, HP Inc., 2018-03, edition 2
E75160IG	HP PageWide Managed Color E75160 Series HP PageWide Managed Color P75250 Series Installation Guide, HP Inc., 2018-03, edition1
M652/3UG	HP Color LaserJet Enterprise M652, M653 User Guide, HP Inc., 2017-05, edition 1
M652IG	HP Color LaserJet Enterprise M652 Installation Guide, HP Inc., 2017
M653IG	HP Color LaserJet Enterprise M653 Installation Guide, HP Inc., 2017
CCpart1	Common Criteria for Information Technology Security Evaluation, Part 1, version 3.1 revision 5, CCMB-2017-04-001
CCpart2	Common Criteria for Information Technology Security Evaluation, Part 2, version 3.1 revision 5, CCMB-2017-04-002
CCpart3	Common Criteria for Information Technology Security Evaluation, Part 3, version 3.1 revision 5, CCMB-2017-04-003
CC	CCpart1 + CCpart2 + CCpart3
CEM	Common Methodology for Information Technology Security Evaluation, version 3.1 revision 5, CCMB-2017-04-004
SP-002	SP-002 Evaluation and Certification, CSEC, 2019-09-24, document version 31.0
SP-188	SP-188 Scheme Crypto Policy, CSEC, 2019-09-25, document version 9.0

Appendix A Scheme Versions

During the certification project, the following versions of the quality management system (QMS) have been applicable since the certification application was received 2017-06-16:

QMS 1.20.4	valid from 2017-05-11
QMS 1.20.5	valid from 2017-06-28
QMS 1.21	valid from 2017-11-15
QMS 1.21.1	valid from 2018-03-09
QMS 1.21.2	valid from 2018-03-09 SIC!
QMS 1.21.3	valid from 2018-05-24
QMS 1.21.4	valid from 2018-09-13
QMS 1.21.5	valid from 2018-11-19
QMS 1.22	valid from 2019-02-01
QMS 1.22.1	valid from 2019-03-08
QMS 1.22.2	valid from 2019-05-02
QMS 1.22.3	valid from 2019-05-20
QMS 1.23	valid from 2019-10-14

In order to ensure consistency in the outcome of the certification, the certifier has examined the changes introduced in each update of the quality management system. The changes between consecutive versions are outlined in "Ändringslista CSEC QMS 1.23".

The certifier concluded that, from QMS 1.20.4 to the current QMS 1.23, there are no changes with impact on the result of the certification.